


| Lage Erkerrohr: außen bündig |       |       |
|------------------------------|-------|-------|
| für Bautiefe:                |       | 80mm  |
| $\beta(^{\circ})$            | X(mm) | Y(mm) |
| 90°                          | 100.0 | 20.0  |
| 95°                          | 96.4  | 23.1  |
| 100°                         | 93.2  | 26.0  |
| 105°                         | 90.1  | 28.7  |
| 110°                         | 87.3  | 31.2  |
| 115°                         | 84.6  | 33.6  |
| 120°                         | 82.0  | 35.9  |
| 125°                         | 79.6  | 38.0  |
| 130°                         | 77.3  | 40.0  |
| 135°                         | 75.1  | 42.0  |
| 140°                         | 73.0  | 43.9  |
| 145°                         | 70.9  | 45.9  |
| 150°                         | 68.9  | 47.5  |
| 155°                         | 66.9  | 49.2  |
| 160°                         | 65.0  | 50.9  |
| 165°                         | 63.1  | 52.6  |
| 170°                         | 61.2  | 54.2  |
| 175°                         | 59.4  | 55.9  |
| 180°                         | 57.5  | 57.5  |

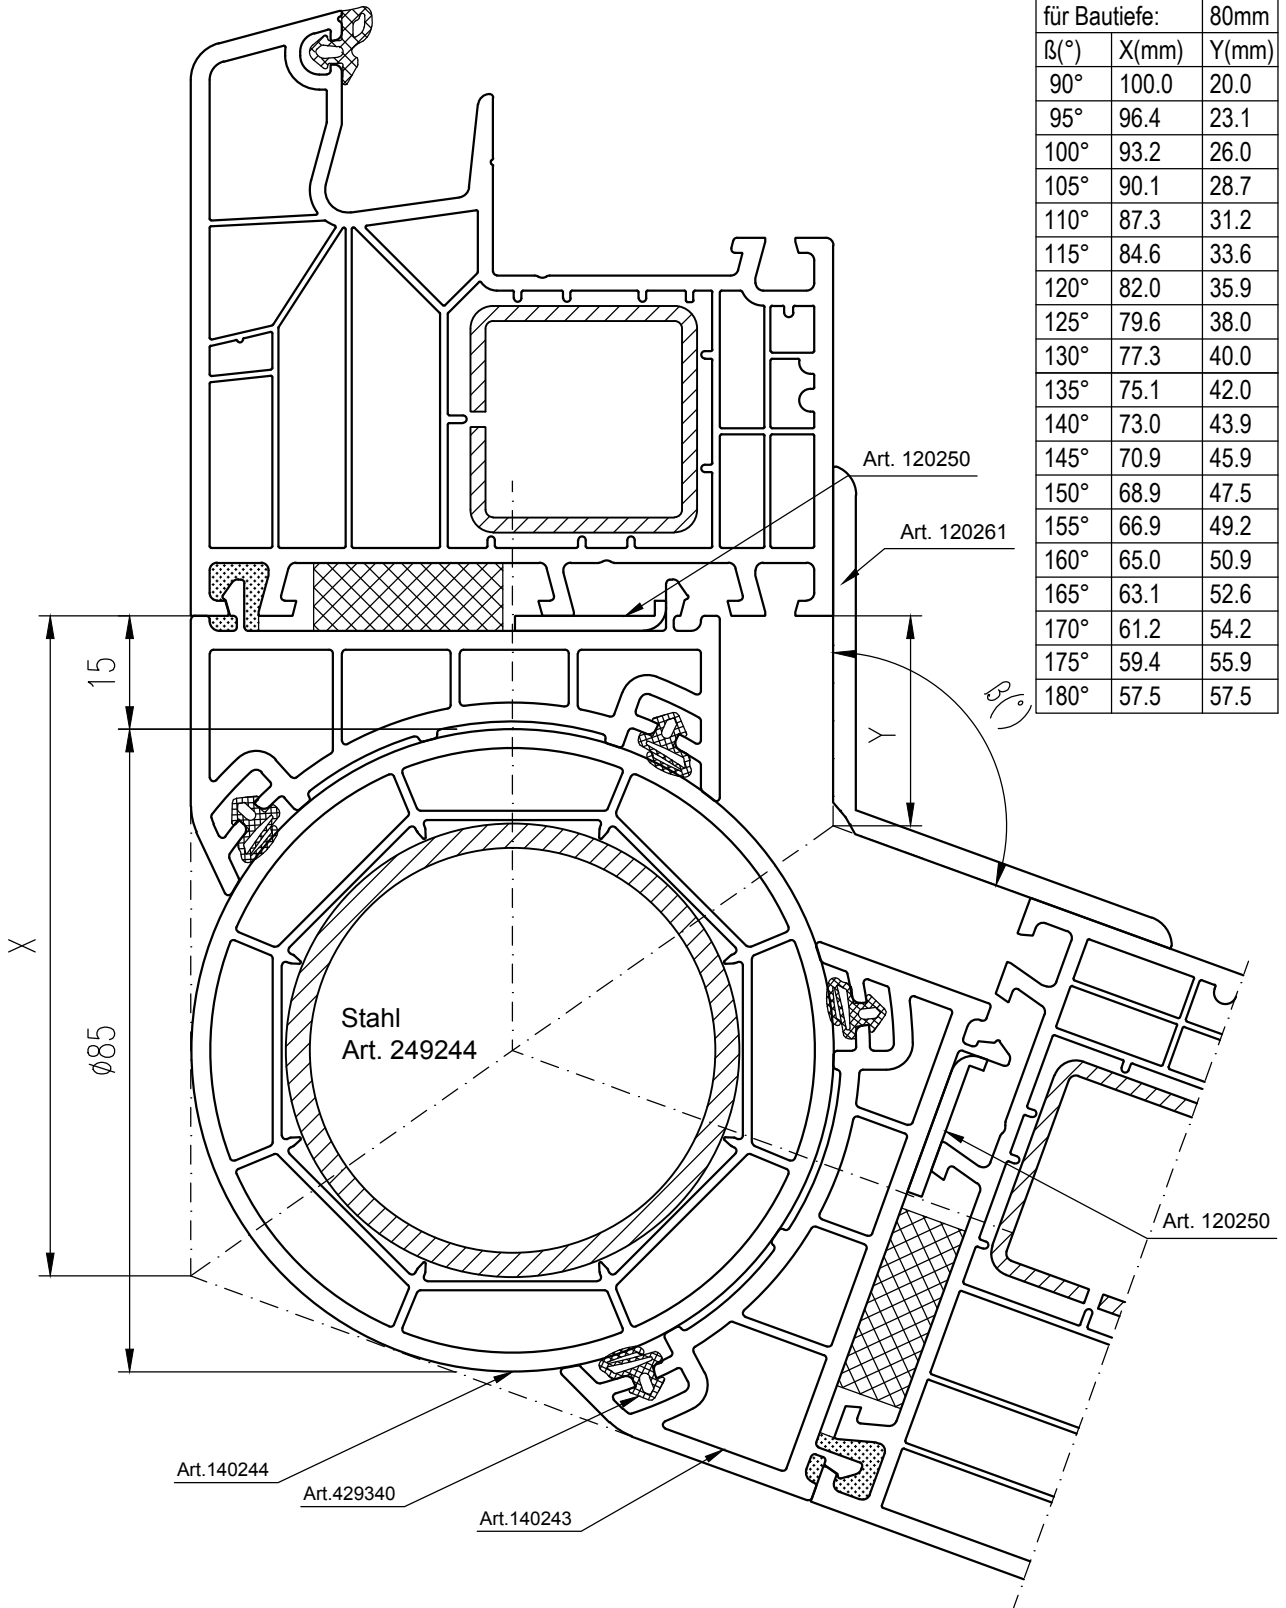

Technische Änderungen vorbehalten!